



3G Modem/CDMA Modem installation Guide

- 1. If you are in Classic Start menu view, click Start > Settings > Control Panel > Network Connections. If you are in Start menu view, click Start > Control Panel > Network Connections.**
- 2. Double click Local Area Connection.**

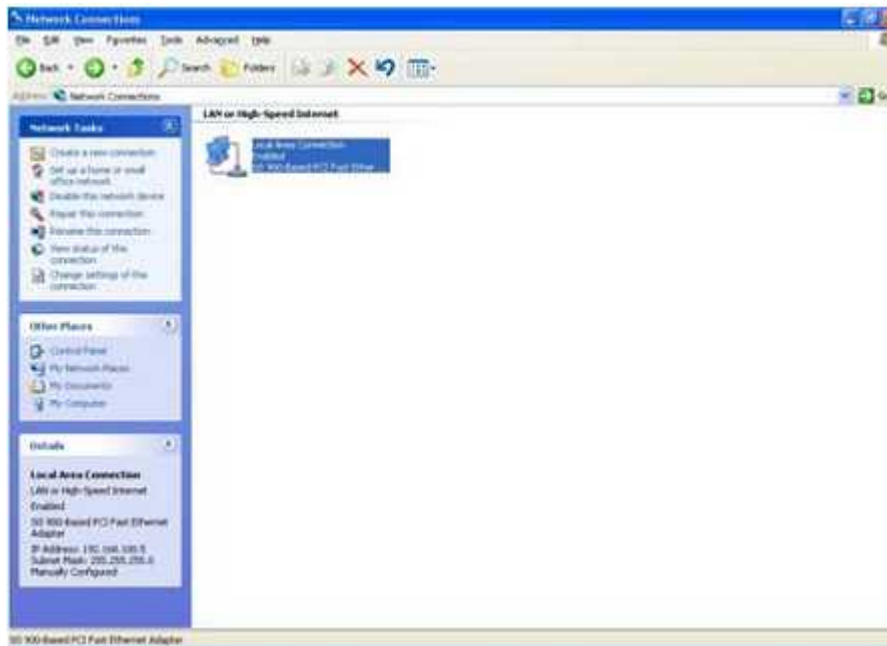

- 3. Choose Internet Protocol (TCP/IP) and click Properties.**


Pocket Wifi 3G ROUTER INSTALLATION Manual

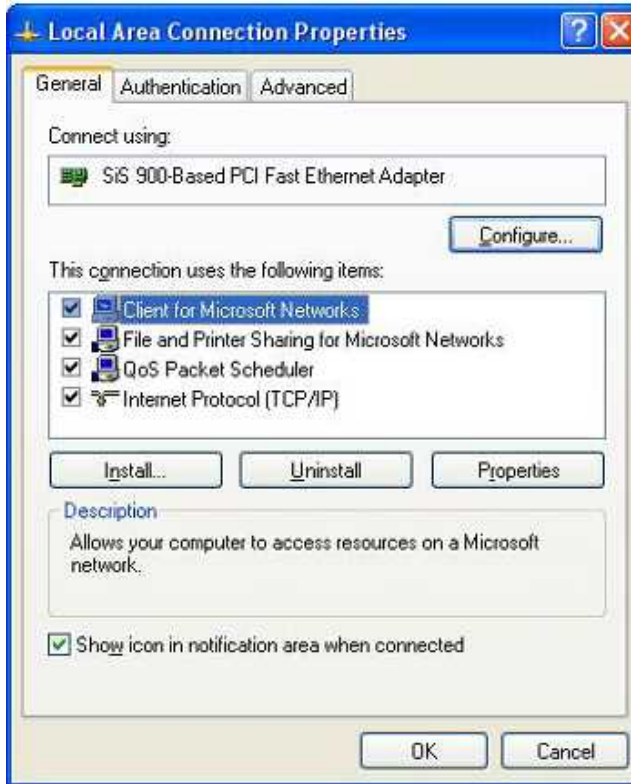

4. You choose “Obtain an IP address automatically”

“Obtain an DNS server address automatically”

After choosing please click the OK button after your configuration.

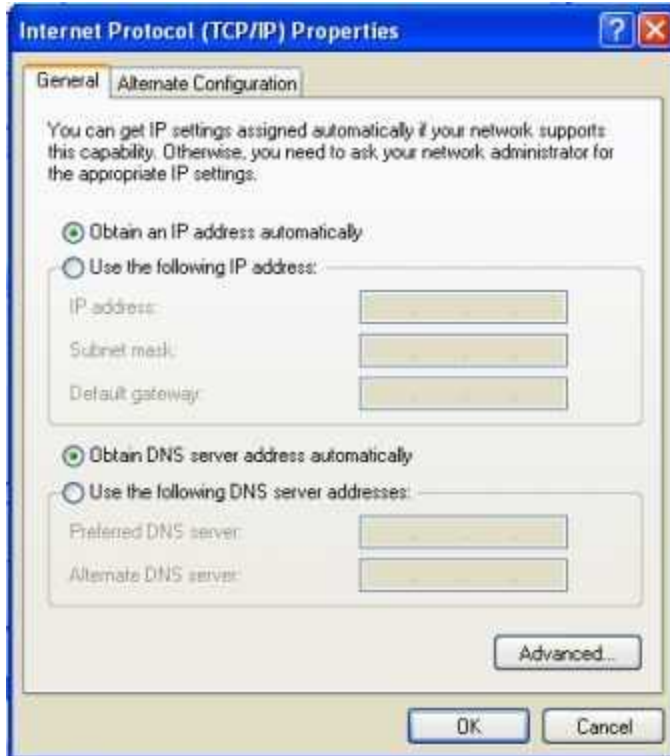

Wireless Router configuration setup

1.(Connect USB Modem to Router in USB Port)

This product provides Web based configuration scheme, which is configuring by

Netscape Communicator or Internet Explorer. Take example for Microsoft Internet

Explorer.

2. Activate your browser, select Tools, point to Internet option, click connect, select

Dial-up network never, affirm inspect setting automatically, and configure scrip

Automatically and use agency server on LAN setting not to be selected. 10

3. Type http://192.168.1.254 in Address field and press Enter. Key in the user name

and password (if you use it first, you can type the factory default setting .User name

is admin and password is admin), click on the OK button.




After login successfully, web-configuration will be displayed.



Click Next>>

Click next>>

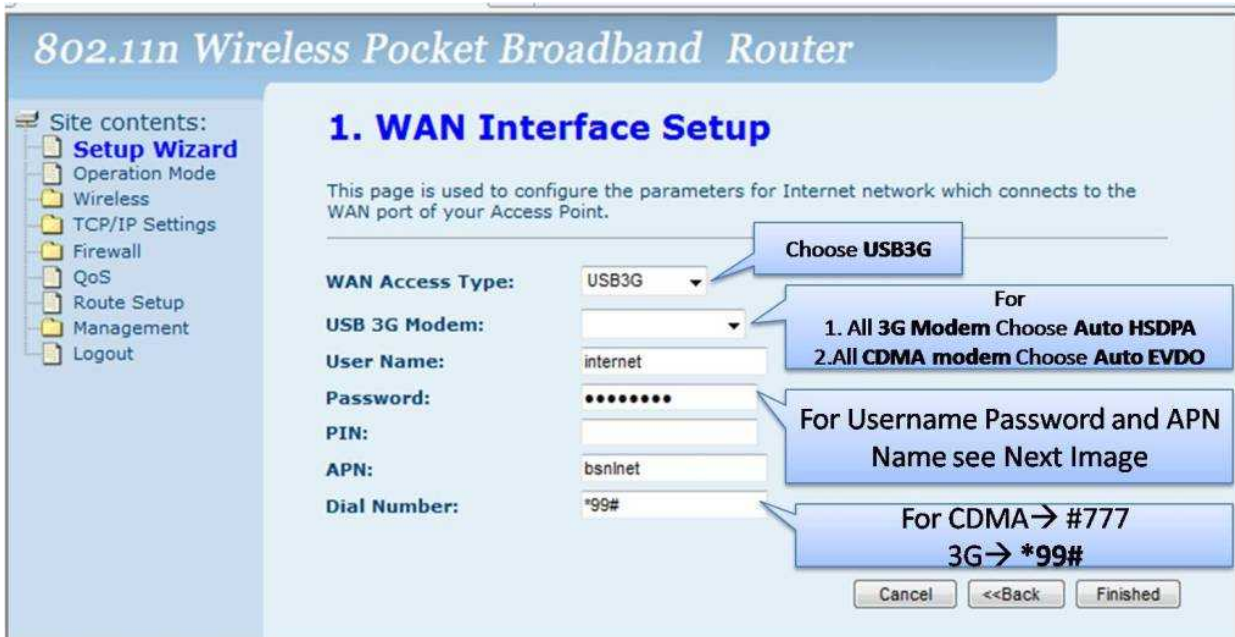

APN NAME: (according to your modem operator name choose APN Name below mentioned)

Operator	APN Name
BSNL (GSM/3G)	bsnlnet
VODAFONE	www
Airtel	airtelgprs.com
Aircel	aircelgprs.pr
Uninor	uninor
Reliance	rcomnet
Idea	internet
Tata Docomo	TATA.DOCOMO.INT ERNET
Videocon	vinternet.com
CDMA Modems	No APN NAME Leave it Blank

Phone Number:

FOR CDMA MODEM ☐ #777

FOR 3G MODEM ☐ *99#

**USERNAME and PASSWORD: (according to your operator name
Choose username & Password below mentioned)**

Service Provider Name	Username	password
BSNL/TATA PHOTON +	Internet	internet
Vodafone, Airtel, Reliance, Aircel, Uninor, Idea, Tata Docomo, Videocon, BSNL EVDO, Reliance NETConnect	10 digit Number (Your Mob/Sim No)	10 digit Number (Your Mob/Sim No)
MTS	Need to ask MTS customer care (MTS already provided)	Need to ask MTS customer care (MTS already provided)

After Click Finished>>



After click rebooted>>

Important: >>Do a Manual switch off then On in the Router

After reboot check:

Pocket Wifi 3G ROUTER INSTALLATION Manual



Check whether Internet Light is blinking or ON
If Blinks router is connected to internet your start to browse
If Not The setting is wrong do once again

Installation over

Thank you for using LeoXsys Product.